
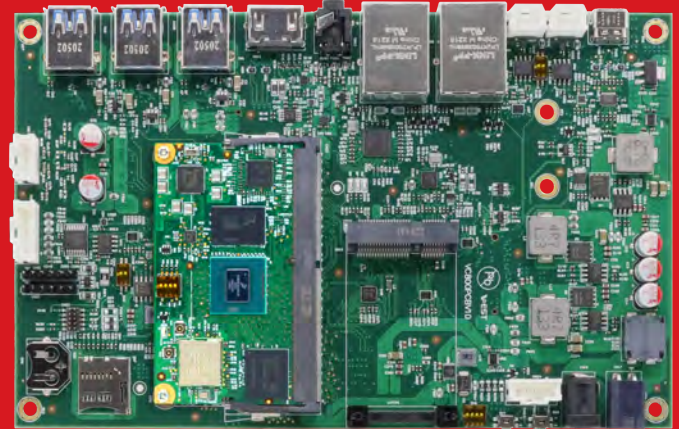


# VEST i.MX8M Plus Dev Kit


VEST-8MP-00-DEV

VEST is a leading embedded solutions provider, committing to excellence and innovation. Our Development Kits expedite product development, enabling swift market entry for your products and ensuring a competitive advantage.



  
Edge  
Computing

  
Rich  
Multimedia

  
High Performance  
CPU

  
Robust Security  
Features

## ABOUT OUR PRODUCT

Introducing the VEST i.MX8M Plus Development (Dev) Kit. This comprehensive solution comprises a System on a Module (SOM) and a Carrier board.

Unleash the full potential of the NXP i.MX8M Plus, featuring ARM® Cortex®-A53 processor and Neural Processing Unit (NPU). This empowers Artificial Intelligence (AI) and Machine Learning (ML) capabilities, enhances multimedia performance, supports cutting-edge Edge Computing, provides robust video graphics, and enables rapid processing – all within a compact, cost-efficient, and power-efficient package. VEST software board support package contains drivers for Leopard Imaging 8.4 Megapixels LI-IMX715-MIPI Camera, allowing optional upgrade possibilities.

This Dev Kit is versatile and suitable for diverse range of applications, such as

- Edge Computing
- Video / Audio Conferencing
- Advanced Human Machine Interface Application
- Point of Sales, Digital Signage, Smart Retail, Smart Cities
- Point of Care
- Portable Test and Measurement Instruments
- Automation for Industry 4.0

## Key Features

- Dedicated NPU to accelerate AI and machine learning
- Accelerate real-time data processing, with dual display
- Rich multimedia capabilities
- Up to 4K camera support
- Built-in 10W audio amplifier (plug and play speaker driver)
- Secured data integrity, safeguard against unauthorized access
- Multiple high-speed interfaces that comply with industrial standards facilitate seamless integration with various peripherals

## Support



**VESTConnect360**  
Cloud Management System



**ADVANCED PRODUCTS CORPORATION PTE LTD (APC)**

All product specifications are subject to change without notice. Last updated: March-2024.  
Copyright © 2024 APC Pte Ltd. All rights reserved. No part of this document may be photocopied, reproduced, or translated to another language without the prior written permission of APC Pte Ltd. All trademarks, logos and brand names used in this brochure are the property of their respective owners. Their use does not constitute an endorsement or affiliation with APC Pte Ltd.



Scan here  
to purchase

Website: [apc-vest.com](http://apc-vest.com)

Email: [sales@apc-vest.com](mailto:sales@apc-vest.com)

E-Store: [shop.apc-vest.com](http://shop.apc-vest.com)

LinkedIn: [www.linkedin.com/company/advanced-product-corporation](http://www.linkedin.com/company/advanced-product-corporation)

# Specifications

CPU Details	
CPU	i.MX8M Plus   4x Cortex®-A53 @ 1.8GHz, Cortex®-M7 @ 800MHz
GPU	16 GLOPS (high-precision) OpenGL® ES 3.1/3.0, Vulkan®, Open CL™ 1.2 FP, Open VG™ 1.1
NPU	Neural Processing Unit (NPU) Operating at up to 2.3 TOPS
Memory	
Memory	2GB 32-bit LPDDR4 up to 4.0GT/s
Storage	8GB eMMC5.1
External Storage	Micro SD 3.0 Socket Push-Push Type
Operating System / Driver	
BSP	Yocto Linux, Ubuntu and Android,
Driver	LI-IMX715-MIPI Camera (Leopard Imaging)
Multimedia	
Video Encoder	1080p60, H.265/4
Video Decoder	1080p60, H.265/4, VP9, VP8
Hi-Fi Audio	Cadence® Tensilica® Hifi 4 DSP @ 800MHz
Camera	2x MIPI CSI with Dual Image Signal Processors
Display Controller	MIPI-DSI, up to UWHD and WUXGA   HDMI 2.0a Tx, up to 4kp30 LVDS (4/8-lane) Tx, up to 1920x1080p60
Display and Touch	On board LVDS and I2C Touch Connector for 7" & 10" LCD Panel   M.2 Key B Form Factor Display Daughter Board   Socket   Dual Channel 4-lane LVDS   4-lane MIPI-DSI   I2C Touch   PWM   Backlight Output
Audio and Video	HDMI 2.0a Type A   3.5mm Headphone Jack with Microphone Input   2mm Pitch, 4 Pin Header for Speaker L&R, Up to 10W/ch into 8ohm Load
Connectivity	
Wireless	On Board Dual Band Wi-Fi/Bluetooth Module (Optional)
Networking	2x 10/100/1000 BaseT RJ45 Ethernet, 1x Ethernet with TSN Support
USB	USB 3.0 OTG, Type C   3x USB 3.0 Host, Type A
Serial Communication	RS485 (Default) or RS232   2x CAN/CAN-FD 2mm Pitch 3 Pin Header
I/O Expansion	M.2 Key B Form Factor Expansion Daughter Board Socket   4-Lane MIPI CSI x 2   Full Size Mini PCIe with Gen3 x 1 Lane Nano SIM Card Socket
Debugging & Programming	2x Debug-UART Header, 2.54mm Pitch 5pin Header   JTAG-1.27mm Pitch 2 x 5 Pin Header
Buttons and Indicators	1x On/Off Button   1x Reset Button   1x On/Off, Reset, Power LED Control Signal Connector-2mm Pitch 5 Pin Header   Power LED Indicator-2x, 3.3V & 5V
Power	12-24VDC, 2.0mm DC Jack or 2 Pin 4.2mm Pitch Mini Fit JR Header
Physical	
Form Factor	180mm x 112mm (Carrier Board) , 69.6mm x 40mm (SOM)
Operating Temperature	Commercial   Industrial (Optional)

## What Encompasses i.MX8M Plus Development Kit

## Optional Upgrade



VEST i.MX8M Plus  
Dev Board

Heat Sink

Power  
Adapter

Plug and Socket

Antenna x2

LI-IMX715-MIPI  
Camera

## ADVANCED PRODUCTS CORPORATION PTE LTD (APC)

All product specifications are subject to change without notice. Last updated: March-2024.  
Copyright © 2024 APC Pte Ltd. All rights reserved. No part of this document may be photocopied, reproduced, or translated to another language without the prior written permission of APC Pte Ltd.  
All trademarks, logos and brand names used in this brochure are the property of their respective owners. Their use does not constitute an endorsement or affiliation with APC Pte Ltd.



Scan here  
to purchase

Website: [apc-vest.com](http://apc-vest.com)

Email: [sales@apc-vest.com](mailto:sales@apc-vest.com)

E-Store: [shop.apc-vest.com](http://shop.apc-vest.com)

LinkedIn: [www.linkedin.com/company/advanced-product-corporation](http://www.linkedin.com/company/advanced-product-corporation)