


VEST SMX i.MX8M Mini

VEST is a leading embedded solutions provider, committing to excellence and innovation. Our VEST SMX i.MX8M Mini in SMARC 2.1 standard form factor expedite product development and manufacturing for supply resilience, enabling swift market entry for your products and ensuring a competitive advantage.



Industrial /
Commercial
IoT

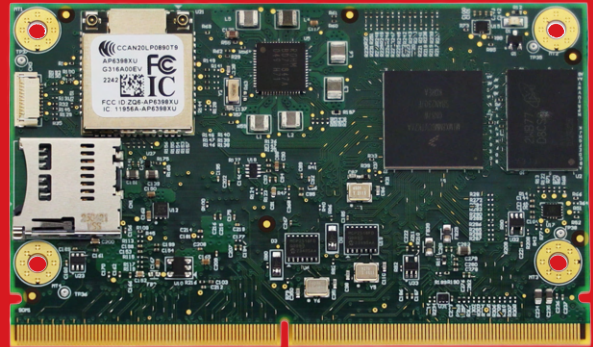

Efficient
CPU



Robust Security
Features



Edge
Computing

ABOUT OUR PRODUCT

Unleash the full potential of the NXP i.MX8M Mini, featuring ARM® Cortex®-A53 processor. This empowers Artificial Intelligence (AI) and Machine Learning (ML) capabilities, enhances multimedia performance, supports cutting-edge Edge Computing, provides robust video graphics, and enables rapid processing – all within a compact, cost-efficient, and power-efficient package.

Introducing the VEST i.MX8M Mini SMARC 2.1 SOM suitable for diverse range of applications, such as

- Edge Computing
- Video / Audio Conferencing
- Advanced Human Machine Interface Application
- Point of Sales, Digital Signage, Smart Retail, Smart Cities
- Point of Care
- Portable Test and Measurement Instruments
- Automation for Industry 4.0

Key Features

- Accelerate real-time data processing, with dual display
- Rich multimedia capabilities
- Secured data integrity, safeguard against unauthorized access
- Multiple high-speed interfaces that comply with industrial standards facilitate seamless integration with various peripherals
- Machine Vision with MIPI-CSI (4-lane)
- NXP eIQ™ software suite

Support



VESTConnect360
Cloud Management System



ADVANCED PRODUCTS CORPORATION PTE LTD (APC)

All product specifications are subject to change without notice. Last updated: March-2024.
Copyright © 2024 APC Pte Ltd. All rights reserved. No part of this document may be photocopied, reproduced, or translated to another language without the prior written permission of APC Pte Ltd.
All trademarks, logos and brand names used in this brochure are the property of their respective owners.
Their use does not constitute an endorsement or affiliation with APC Pte Ltd.



**Scan here
to purchase**

Website: apc-vest.com

Email: sales@apc-vest.com

E-Store: shop.apc-vest.com

LinkedIn: www.linkedin.com/company/advanced-product-corporation

Specifications (VEST SMX i.MX8M Mini)

CPU Details	
CPU	Up to 4x Cortex®-A53 @ 1.8GHz, Cortex®-M4 @ 400MHz
GPU	GCNanoUltra for 3D Graphics GC320 for 2D
Memory	
Memory	2GB (up to 8GB for QUAD Core, otherwise 3GB) 32-bit LPDDR4-3000
Storage	8GB (up to 128GB) eMMC5.1
External Storage	1x Micro SD 3.0 Socket Push-Push Type via SDIO 3.0
Operating System / Driver	
BSP	Yocto Linux, Ubuntu and Android
Security	
SOC	Arm®TrustZone® DRM Ciphers, Secure Clock, eFuse key storage, Random Number, 32KB Secure RAM
Secure IOT/Cloud	Security key Storage
Multimedia	
Video Encoder	1080p60, H.264, VP8
Video Decoder	1080p60, H.265, H.264, VP9, VP8
Camera	1x MIPI CSI (4-lane)
Display	Dual Channel LVDS (default) or MIPI DSI (4-lane)
Audio	2x SAI
Connectivity	
Wireless	On SOM Board Dual Band Wi-Fi/Bluetooth Module (802.11a/b/g/n/ac and BT 5.0) (Optional)
Networking	10/100/1000 BaseT RJ45 Ethernet
USB	1x USB 2.0 OTG, 4x USB 2.0 Host
PCIe	1x PCIe Gen 2.0
Serial Communication	3x UART (for Wifi-BT version) or 4x UART (for without Wifi-BT version)
SPI	2x SPI or 1 SPI with 1x CAN FD (Depend on board build configurations)
CAN	2x CAN FD w/o SPI, or 1x CAN FD with 1x SPI (Depend on board build configurations)
I2C	4x I2C
GPIO	9x GPIOs (Note that additional GPIOs are retrieved from unused control signals eg. Camera control signals)
Debugging	1x JTAG Connector
Power	5Vdc +/-5%
Physical	
Form Factor	82mm x 50mm SMARC 2.1
Operating Temperature	Commercial Industrial (Optional)
Ordering Information	
Part No.	VPN8MM5-SMX-41-WC VPN8MM3-SMX-41-WC VPN8MM1-SMX-41-WC

